
# 83650-267

1/2 HP AC Chain Drive Wi-Fi® Garage Door Opener with Integrated Bluetooth® Technology



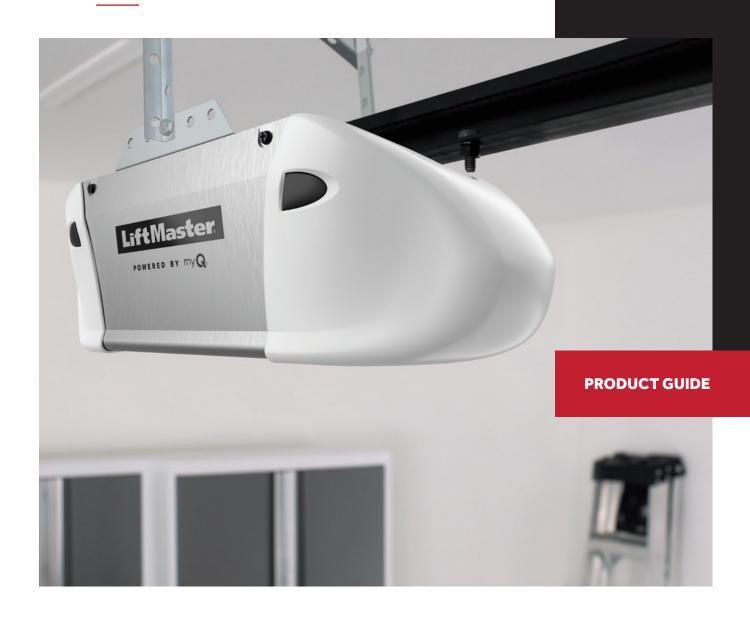

## 83650-267

1/2 HP AC Chain Drive Wi-Fi Garage Door Opener with Integrated Bluetooth Technology



## **Popular features**

#### **AC Motor**

Purposefully designed and built to last.

#### myQ® Connected

Control, secure and monitor the garage from the myQ app anytime, from anywhere.

## Secure in-garage delivery

Enables Amazon Key In-Garage Delivery - free for Amazon Prime members.

### Security+ 2.0®

Safeguards garage access by sending a new code with every click of the remote.

## Invisible light beam system

Auto-reverses the garage door if there is an obstruction.

#### Posilock® protection

Electronically protects against forced openings of the door.

#### **Integrated Bluetooth technology**

Reduces setup time and makes it even easier to connect to the myQ app, other myQ devices and smart home technology solutions.


#### Lighting

Dual light lens that purposely brightens high traffic areas of the garage.

## Chain drive system


For steady performance and industrial strength.





## Do more with myQ


Use the myQ app to control, secure and monitor your garage and conveniently share and manage access to your home without sharing passcodes or keys. Also, take the hassle out of service repair and easily connect to a trusted Dealer through the myQ app.




## myQ Diagnostics

As often as you go in and out of your garage each day, it can be stressful when your garage door doesn't open. myQ Diagnostics, in the myQ app, provides real-time insights for your garage door via the Health Report. You will be sent alerts if an issue arises and connected to professional services if needed.

## In the box





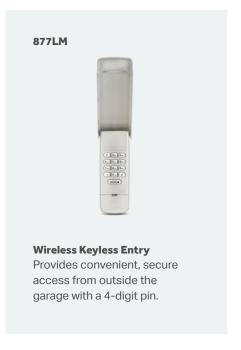

## **Specifications**

#### Motor

1/2 Horsepower AC, 1,625 RPM, automatic thermal protection, permanent lubrication

#### Mechanics

- Steel chassis, T-rail and trolley, full chain drive mechanism (16:1 gear reduction and adjustable door arm)
- Auto-force adjustment for changing weather and environmental conditions
- Electronic limits for easy setup
- AC Wi-Fi logic board with built-in surge suppressor (for replacement logic boards, order part 050ACTB)

#### **Power**

120V AC, 60 Hz voltage, 2.7A current rating, UL® Listed, 4' power cord (3-prong)

#### Speed

7" per second upward, 7" per second downward

#### Lighting

Max. 2 100-watt lightbulbs; Solid-state light delay; Adjustable time; Enhanced CFL (compact fluorescent) compatible, max. 26 watts.

#### Dimensions

Rail Options:	7'	8'	10'
Installed Length:	128"	140"	164"
Max Opening:	7' 6"	8' 6"	10' 6"

Headroom clearance required: 2"

#### Warranty

Lifetime: Motor 1 Year: Parts

#### Security+ 2.0

Radio controls:

Operating range: ~200'; Operating temperature: ~35°F to 150°F; (2) 3-Button Remote Control (893LM); Wireless Keyless Entry (877LM); Remote Controls Code Format: Security+2.0; Keyless Entry Code Format: Security+ 2.0; Garage Door Opener Format: Security+2.0; Anti-burglary coding.

#### Encrypted controls:

Multi-Function Control Panel (882LMW); Program remote controls; Maintenance alert system; Easy Wi-Fi setup.

#### myQ Radio

902-928 MHz 50-channel FHSS (frequency hopping spread spectrum); Provides 2-way communication from garage door opener and myQ accessories; Enables monitoring and control of garage door openers via smartphone or tablet.

#### HomeLink® compatible (version 4.0 or higher)

May require an external adapter depending on the model and year of your vehicle. Visit HomeLink.com for additional information.

#### **Convenience and safety**

Alert-2-close/unattended close operation (with select accessories)<sup>†</sup>; Emergency/quick release; Automatic trolley reconnect; Ventilation/pet opening; Down safety reverse; Up safety stop; Maintenance alert system; Garage door opener capacity of up to 24 remote controls, 2 keyless entry systems and 16 myQ devices.

#### Carton 1 shipping details

Dimensions: 20" x 12" x 10"

Contents: Garage Door Opener Head (83650), Multi-Function Control Panel (882LMW), (2) 3-Button Remote Controls (893LM), Wireless Keyless Entry (877LM); The Protector System® Safety Reversing Sensors Weight: 21 lbs.

#### Carton 2 shipping details

Dimensions: 10'4" x 5" x 5" (for 7' rail)

Contents: Assembled Solid-Steel Chain T-rail

Weight: 20 lbs.



## For purchase and professional install

## Visit LiftMaster.com

#### For partners

Orders: 800.282.6225 | Support: 800.528.2806 | Self service: LiftMasterTraining.com

 $\textbf{†WARNING:} \ to \ reduce \ the \ risk \ of \ injury \ to \ persons - ONLY \ enable \ Timer-to-Close \ and \ myQ \ remote \ operation \ features \ when \ opener \ is \ installed \ on \ a sectional \ door.$ 

© 2022 The Chamberlain Group, LLC. All Rights Reserved.

LiftMaster, the Liftmaster logo, myQ and the myQ logo are registered trademarks of The Chamberlain Group, LLC. UL® and the UL logo are trademarks of UL LLC. Wi-Fi® is a registered trademark of Wi-Fi Alliance. HomeLink® and the HomeLink House® logo are registered trademarks of Gentex Corporation. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc.